

EIP-10V


XGA "All-in-One" DLP™ Projector

More than a just a great Data/Video Projector, the EIP-10V has a DVD player, Media Card player and TV tuner built-in, so you're always ready to present... at home or on the road.



EIKI

A-key to better communications.

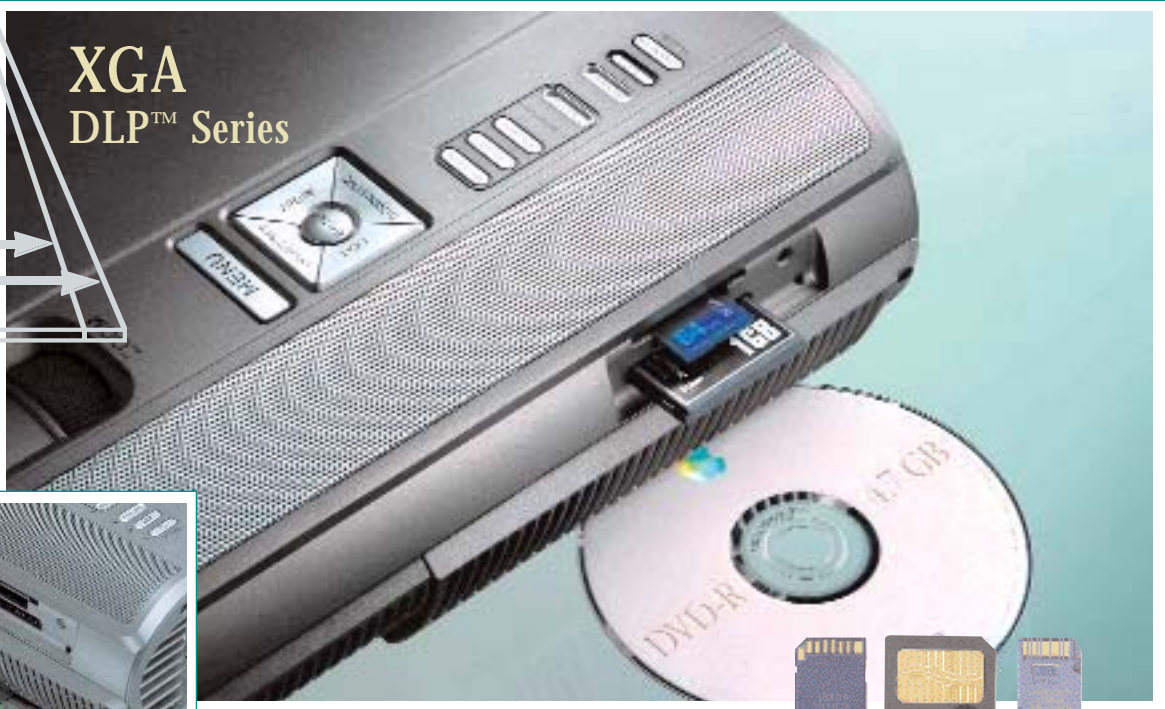

Built-in DVD Player



Three Memory Card Slots



Built-In TV Tuner



Optional Wireless Speakers



KEY FEATURES: Model EIP-10V

- Self-Contained Multi-Source Projection System: just add your computer.
- Includes XGA Projector, DVD Player, Media Card Player, TV Tuner.
- Weighs about 10.5 lbs! Combines all these devices in one compact package.
- DLP™ projector delivers 1800 ANSI Lumens and a 2200:1 contrast ratio.
- True XGA resolution. SXGA, XGA, SVGA, and VGA compatible.
- Quiet operation: operating noise about 32 dBA (typical).
- Smart data compression/expansion, and video scaling.
- Precision optical engine and manual zoom and focus lens.
- Preset image offset. Vertical digital keystone correction. 32X digital zoom.
- Accepts Composite, S, and Component Video (i/p) in all major standards.
- Displays both Normal 4:3 and Widescreen 16:9 ratio video formats.
- Supports HDTV at 1080i, 1035i & 720p. Supports SD at 480i/p & 575i/p.
- Built-in DVD player with "Intelligent Progressive Scan" for a film-like image.
- Media Card Player supports most Movie, Photo and Audio media.
- 5.1 Channel Audio Output. Wireless Audio Output (speakers optional).
- Wireless remote controls all included devices. Carry case included.
- 3 Year* System Warranty!



Ä-key to better communications.

Specifications: Model EIP-10V

DATA/VIDEO PROJECTOR

Screen Brightness	1800 ANSI Lumens
Illumination Uniformity	80%
Size of Color Palette	16.7 Million Colors
Contrast Ratio	2200:1 (Full ON/OFF)
Horizontal Resolution	480 TV Lines (S-Video)
Projection Lamp	250 Watt P-VIP
Estimated Lamp Life	2000 Hours Normal, 3500 Hours Eco
Imaging System	0.7" DDR XGA DMD, 4 Segment Color Wheel RGWB
Screen Pixels	1024 x 768 in stripe configuration
Total Pixels	786,432 (1024 x 768)
Lens Type	Manual Zoom and Focus
Lens Specs	Speed: f:2.8-3.1; FL: 1.02-1.18 in. (25.8-30.0 mm)
Lens Ratios	Zoom Max:Min: 1.2:1; Throw:Width: 1.8-2.1:1
Image Diagonal	40-300 in. (101.6-762 cm)
Image Width	2.5 - 20 ft. (0.76-6.1 m)
Throw Distance	4.8-36.1 ft. (1.46-11 m.)
Front Elevation / Maximum Tilt	up to 15° up / +/- 45°
Anti Keystone	Fixed Image Offset, Ratio (Top:Bottom) est. 10:0 (100%)
Vertical Keystone Correction	Digital: up to 12° up or down
Scanning Frequency	Auto: H Sync. 15-82kHz; V Sync. 50-85 Hz
Dot Clock	157.5 MHz
Image Orientation	Normal, Reversed, Inverted
Remote Control	Wireless (Infra Red) x 1
Computer Native Resolution	1024 x 768 (XGA)
Computer: Compatibility	SXGA, XGA, SVGA, VGA
Computer: Formats	1280x1024, 1024x768, 800x600, 640x480
Computer: Higher Resolutions	Displayed Smart Compressed
Computer: Lower Resolution	Displayed Smart Expanded
Computer Input: Data	Analog -HD15 x 1
Audio	Stereo - MiniStereo x 1
Computer Output	(Monitor) HD15 x 1 Video Color Systems NTSC / PAL / SECAM / NTSC 4.43 / PAL-M&N
Video Resolutions	480i/p, 576i/p, 720p, 1035i, 1080i
Video Formats Supported	Normal 4:3 and Wide Screen 16:9
Video: Image Sizing	Video Scaling Technology
Video Input - 1. Composite	RCA x 1 (Y)
2. S-Video	S-Video x 1 (Y/C)
3. Component	RCA x 3 (Y,Pb/Cb,Pr/Cr)
Audio	Stereo: RCA x 2 (L&R)

INCLUDED SOURCE DEVICES

DVD Player:	Slot-in type. Progressive Scan with 2-3 Pulldown Support Supports DVD, VCD, CD, Interactive VCD, S-VCD, MP3, JPEG file
Media Card Player:	3 Bays: CF/SM/MD/MS/SD/MMC media Plays Photo (JPG) Movie (MPEG1 & 2) and Music (MP3) files
TV Tuner:	"F" Terminal x 1 NTSC Channels 1-125

OVERALL SYSTEM

Internal Audio: Amplifier	Mono: 2 Watt
Speaker	1.5 in. (4.0 cm) x 1
Audio Output (Wired)	Stereo - MiniStereo x 1
5.1 Channel	MiniStereo x 3
Operating Noise	32 dBA typical
Cabinet Size (HxWxD)	3.6 x 14.7 x 11.4 in. (92.0x37.4x29.0 cm.)
Weight	10.4 lbs. (4.71 kg)
Packaged Size (HxWxD)	12.0 x 19.5 x 16.0 in. (30.5x49.5x40.6 cm)
Packaged Weight	26.5 lb (12 kg)
Power Requirements	100-240V AC, 50/60Hz
Power Consumption / Heat	Normal 330 W / 1126 BTU/hr (284 Kcal/hr)
Power Cord	6' (2M) Type 3, Detachable
Compliance	FCC Class B, cULus Listed
Security Facilities	Kensington® Security Slot
Operating Temperature	41-95° F (5-35° C)
User Maintenance	Replace Lamp
Warranty: System	3 Yr. / 6000 Hr. *(Parts & Labor to Correct Defects)
Warranty: Lamp	90 Days (Failed Lamp Replaced Pro-Rata * Whichever occurs first

OPTIONAL WIRELESS STEREO SOUND SYSTEM


Built-in Wireless Audio Transmitter	Frequency: 2400 MHz band Channels: 8; Spacing: 7 MHz (min)
Optional Wireless Amplified Speakers	25W x 2
Size (each):	10.6x6.7x7.1 in (27x17x18 cm)
Weight - pair:	18.3 lb (8.3 kg)
Packaged Size (pair):	14x19x10 in (35.5x48.3x25.4 cm)
Packaged Weight (pair):	21.2 lb (9.6 kg)
Power Requirements:	100-240V AC, 50/60Hz
Power Consumption:	100 W

Specifications subject to change without notice.

©2004 EIKI International, Inc. Printed in the USA. 6/01/04



A-key to better communications.

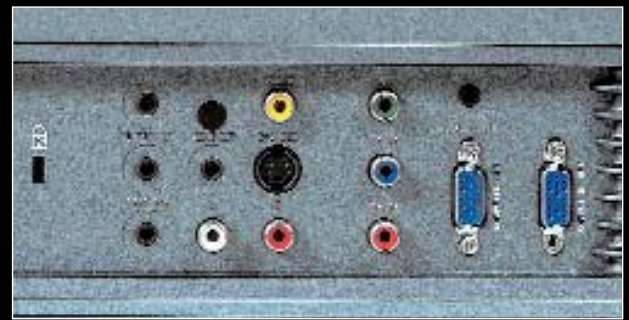

Here's everything you need to connect and project.



INCLUDED ACCESSORIES:

Quick Start Guide. Owner's Manual.
North America 3-prong grounded and polarized AC Power Cord & 2-prong polarized Adapter with ground wire.
European 2-prong AC Power Cord. Lens Cover & Retainer. VGA-type Computer In/Out Cable (HD15 ~ HD15). MAC Adapter. Computer Audio In/Out Cable (Stereo Mini-Stereo Mini). Audio Mono-Stereo "Y" Cable (RCA x 1 ~ RCA x 2).
Wireless Remote Control with 2 AAA Batteries. Padded Carry Bag with shoulder strap.

OPTIONAL ACCESSORIES:

Replacement Lamp. Wireless Speakers.
Ceiling Mount. Ceiling Post and Plate.

One wireless remote controls all functions.

**VISUAL
TECHNOLOGIES**
CORPORATION
www.visualtec.com
1620 Burnet Avenue
Syracuse, NY 13206
(315) 423-2000 tel
(315) 423-0004 fax
contact@visualtec.com

Eiki International, Inc.

30251 Esperanza., Rancho Santa Margarita, CA 92688
Tel: 800-242-3454; Fax: 800-457-3454, E-mail: usa@eiki.com

In Canada, 310 First St. - Unit 2, P.O. Box 156, Midland, ON L4R 4K8
Phone: 800-563-3454, Fax: 800-567-4069 E-mail: canada@eiki.com

Fax-on-Demand: (Toll Free) 877-345-4329

Visit our World Wide Web site: <http://www.eiki.com>