

Panasonic
ideas for life

PT-DW7000U/U-K

3-Chip DLP® WXGA Projector

Native 16:9 Wide-Screen Impact



PT-DW7000U-K





3-Chip DLP® Technology in a Sleek, Compact Body

The World's Lightest 3-Chip Large-Venue DLP® Projector

The PT-DW7000U series combines the latest 3-chip system based on DLP® technology with a new optical system developed using our exclusive technology. We have dramatically reduced the cabinet size, creating a unit with only one-fifth the volume of conventional large-venue 3-chip DLP® projectors. This feat of design and technology achieved the world's lightest* WXGA 3-chip projector with DLP® technology. With a weight of 48.5 pounds (22.0 kg), the PT-DW7000U/U-K can go places other bulky 3-chip projectors with DLP® technology have never gone before.


* As of December 2006.



Superb Image Quality

Native 16:9 Panels

The PT-DW7000 is the world's first 3-chip DLP® installation projector with 16:9 wide aspect panels. Unique to Panasonic, these panels let the PT-DW7000U/U-K project wide-screen images without sacrificing the superior image quality provided by DLP® technology. They also fit more information onto a PC screen.

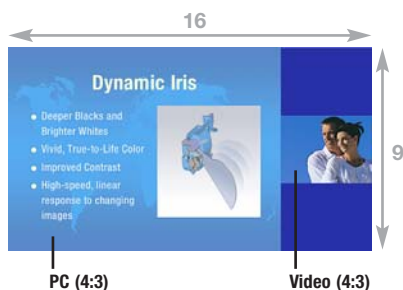

Picture in Picture images also fit more easily onto the screen.

Image Quality from 3-Chip DLP® Technology

DLP® technology delivers outstanding image resolution. In 3-chip systems with DLP® technology—considered among the world's most advanced projector engines—a DLP® chip is allocated to each of the red, green, and blue signals. This gives systems with DLP® technology superior light utilization for high brightness, digital processing for low noise and linear white balance, extended device life for minimal image degradation, and a quick response that eliminates afterimages.

Powerful 6,000 Lumens

In addition to the 300-watt UHM™ lamp, the PT-DW7000U series incorporates digital and optical technologies that maximize the DLP® technology advantages. They deliver 6,000 Lumens of brightness, offering superior color reproducibility.

Astounding 4,000:1 Contrast Ratio with Dynamic Iris

Panasonic's original Dynamic Iris achieves a dramatically improved contrast ratio of 4,000:1 in the PT-DW7000U series. Dynamic Iris constantly monitors the input signal, and adjusts the intensity of the light source to match it. This highly advanced function provides high-speed, linear response to changing images with 256-step precision. It also combines with dynamic gamma control to produce deep, rich blacks while preserving the brightness in the lighter portions of dark scenes.

16-Bit Color Depth for Film-Like Natural Image

Applying 16-bit drive to each of the RGB panels produces 8 times the level of expression (a total of 24 times for all three RGB panels) of conventional 13-bit drive devices. This system creates extremely smooth tonal expression with approx. 65,000 shades of gradation.

Progressive Cinema Scan (3/2 Pulldown)

This interlace/progressive conversion technology automatically detects when the input signal is derived from filmed material and selects the optimum progressive processing method to assure faithful reproduction of the original image. It is also compatible with the high-definition 1080i format.


Dynamic Sharpness Control

The Dynamic Sharpness Control circuit adjusts the video signal waveforms based on the difference in the brightness of adjacent pixels for a sharp, clear picture that is relatively unaffected by signal noise.

High Reliability and Easy Maintenance

Liquid-Cooling System

In systems with DLP® technology, the microscopic mirrors of the DLP® chip turn the light on and off. During the off period, light is directed away from the lens. Handling the heat from this light is a major point in maintaining the long-term performance of projectors with DLP® technology. Panasonic's newly developed liquid-cooling system extends projector performance and attains a high level of reliability.

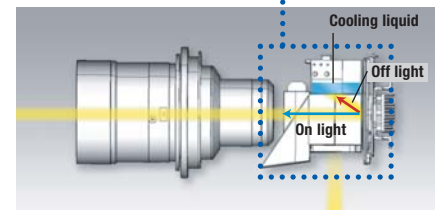

Dustproof Design with Sealed Optical Block

We have minimized the effect of dust by completely sealing the optical block. This dust-free design helps ensure that 3-chip projectors with DLP® technology will continue to deliver crisp, sharp, high-resolution images over an extended service life.

Dual Lamp System and Lamp Relay Function

The use of two lamp systems increases brightness and eliminates the need to interrupt a presentation if a lamp burns out (in dual lamp operation mode). In single lamp operation mode, the lamp relay function greatly extends continuous operating time.

Optional Long-Life Lamp

A long-life lamp that stretches lamp life to 4,000 hours is available as an option. In single lamp operation mode, the lamp relay

- Wireless/wired remote control unit with wireless mouse function*
- ID assignment for up to 64 units
- Coordinated group control for up to 26 groups (A-Z)
- Picture in picture (main/sub input source combinations possible only when using computer and video)
- Digital vertical keystone correction
- 3x digital zoom
- Built-in test pattern



Wireless/wired remote control

- Selectable 9-language on-screen menu (English, German, French, Spanish, Italian, Russian, Japanese, Chinese, Korean)

* Requires the optional ET-RMRC2 wireless mouse receiver



Available in black (PT-DW7000U-K) and white (PT-DW7000U) cabinet colors.

Ecology-Conscious Design

Panasonic works from every angle to minimize environmental impact in the product design, production and delivery processes, and in the performance of the product itself over its life cycle. The PT-DW7000U series reflects the following ecological considerations.

- Lead-free solder is used to mount components to the printed circuit boards.
- Lead-free glass is used for the lens.
- The packing case and operating manual are made from recycled paper.
- Lamp power switching further reduces power consumption.

Options for More Flexible Installation

Lenses



ET-D75LE1

1.0-1.2:1 Zoom Lens
ET-D75LE6

1.5-2.0:1 Zoom Lens
ET-D75LE1

2.0-3.0:1 Zoom Lens
ET-D75LE2

3.0-5.0:1 Zoom Lens
ET-D75LE3

5.0-8.0:1 Zoom Lens
ET-D75LE4

8.0-15.0:1 Zoom Lens
ET-D75LE8

0.8:1 Fixed-Focus Short-Throw Lens
ET-D75LE5

Boards



Network Board
ET-MD77NT



DVI-D/Network Board
ET-MD77DV



SD-SDI/Network Board
ET-MD77SD1

- 480i, 576i



HD-SDI/SD-SDI/Network Board
ET-MD77SD3

- 480i, 576i, 720/60p, 720/50p, 1035/60i, 1080/60i, 1080/50i, 1080/25p, 1080/24p, 1080/24sF, 1080/30p



Lamps



Replacement Lamp Unit
ET-LAD7700

Replacement Lamp Units
(Twin pack of ET-LAD7700 lamp units)
ET-LAD7700W

Replacement Long-Life Lamp Unit
ET-LAD7700L

Replacement Long-Life Lamp Units
(Twin pack of ET-LAD7700L lamp units)
ET-LAD7700LW

Receiver

Wireless Mouse Receiver
ET-RMRC2



Handle

Carrying Handle
ET-HAD75



Brackets



Ceiling Mount Bracket
ET-PKD77H



Low Ceiling Mount Bracket
ET-PKD75S


Dual Stacking Mount Bracket
ET-PDF75



Projection Distance

Diagonal image size (aspect ratio: 16:9)	Distance to screen													
	ET-D75LE6 1.0-1.2:1		ET-D75LE1 1.5-2.0:1		ET-D75LE2 2.0-3.0:1		ET-D75LE3 3.0-5.0:1		ET-D75LE4 5.0-8.0:1		ET-D75LE8 8.0-15.0:1		ET-D75LE5 0.8:1 fixed	
	min.	max.	min.	max.	min.	max.	min.	max.	min.	max.	min.	max.	min.	max.
70"	1.8 5.8	1.6 5.1	1.9 6.1	2.3 7.6	3.1 10.1	3.1 10.3	4.7 15.5	4.7 15.5	7.9 26.0	7.9 26.0	12.7 41.7	12.4 40.7	23.7 77.8	1.2 3.8
100"	2.5 8.3	2.3 7.4	2.7 8.9	3.4 11.0	4.5 14.8	4.5 14.8	6.8 22.3	6.8 22.3	11.4 37.4	11.4 37.4	18.2 59.7	17.9 58.7	33.9 111.2	1.7 5.5
200"	5.1 16.7	4.6 15.0	5.5 17.9	6.8 22.2	9.1 29.7	9.1 29.7	13.7 44.9	13.7 44.9	22.9 75.1	22.9 75.1	36.5 119.8	36.2 118.8	68.3 224.1	3.5 11.3
300"	7.6 25.0	6.9 22.6	8.2 27.0	10.2 33.5	13.6 44.7	13.7 45.0	20.6 67.5	20.6 67.5	34.4 112.9	34.4 112.9	54.8 179.9	54.5 178.8	102.6 336.6	5.2 17.1
400"	10.2 33.3	9.2 30.2	11.0 36.1	13.6 44.7	18.3 60.0	18.3 60.0	27.5 90.1	27.5 90.1	45.9 150.7	45.9 150.7	73.1 239.9	72.9 239.2	136.9 449.1	- -
600"	15.2 50.0	13.8 45.3	16.5 54.3	20.5 67.1	27.4 89.8	27.5 90.2	41.3 135.3	41.3 135.3	68.9 226.2	68.9 226.2	109.7 360.0	109.5 359.3	205.5 674.2	- -

Projection Range Example

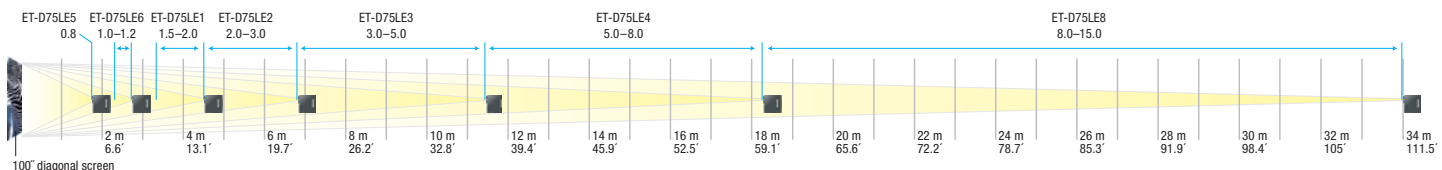

16:9 Wide Panels
4,000 : 1 Contrast Ratio

Bright, Vivid Images that Deliver All the Emotion and Excitement

Only a projector that offers superior brightness and contrast can give you vivid, faithful reproduction of images that have both light and dark areas, such as a starship in outer space or a face partly cloaked in shadow.

A projector like Panasonic's PT-DW7000U series.

The PT-DW7000U series combines outstanding 6,000-lumen brightness with 4,000:1 contrast*. Also featuring Texas Instruments DLP® technology and unique 16:9 wide-aspect panels (1,366 x 768), this 3-chip DLP® projector truly excels in the projection of movie sources.

The PT-DW7000U series also adds features such as Dynamic Iris, which improves contrast by matching the lamp output to the input signal. The liquid-cooled optical engine boosts both reliability and durability while greatly reducing operating noise.

The PT-DW7000U series is suitable for a wide variety of applications, from boardrooms, conference rooms, post-production, and broadcasting to premium home theaters.

* With the Dynamic Iris set to 3.



Dynamic Iris: Deeper Blacks, Brighter Whites, and Vivid, True-to-Life Color

Incorporating Panasonic exclusive technology, the Dynamic Iris opens and closes with exceptional speed and precision as the input signal changes, resulting in accurate, real-time control of the light striking the DLP® chips. The Dynamic Iris is positioned immediately after the light synthesizer and before the integrator, so it has minimal adverse effect on the overall light uniformity across the screen.



Competitor A

Blacks and other dark portions are washed out.





Competitor B

Thanks to functions such as lamp power switching, the blacks are not washed out. The white portions, however, become dim and dull.



Dynamic Iris and Dynamic Gamma

Dynamic Iris quickly fine-tunes the lamp output with 256-step precision. Dynamic Gamma preserves the brightness in bright portions, helping maintain a wide dynamic range.

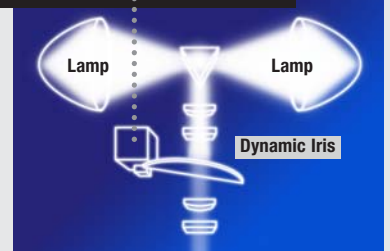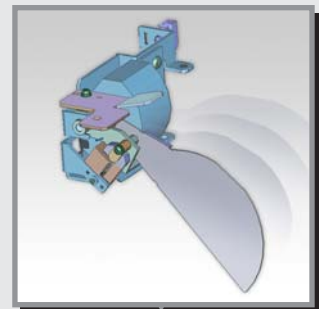

Specifications

System	DLP® system
Device	0.85" (diagonal) DLP® chip (x 3), 16:9
Device	1,049,088 (1,366 x 768) x 3
Pixels	300 W UHM™ lamp x 2 (BriteOptic™ Dual Lamp System)
Lamp	6000 lumens (dual lamp) 3000 lumens (single lamp)
Brightness	4000:1 (full white/full black, with dynamic iris set to "3")
Contrast ratio	
Resolution	
RGB	1366 x 768 pixels
Video	560 TV lines
Lens	Optional
Screen size	70"–600" diagonal (70"–300" diagonal, 16:9 aspect ratio with the ET-D75LE5)
RGB input scanning frequency	fh 15–100 kHz, fv 24–120 Hz, Dot clock 20–162 MHz
Component signal	480i, 576i, 480p, 576p, 720/60p, 1035/60i, 1080/60i, 1080/50i, 1080/25p, 1080/24p, 1080/24sF, 1080/30p
Video signal	NTSC, PAL, SECAM, M-NTSC, PAL60, PAL-M, PAL-N
Terminals	
VIDEO IN	BNC
VIDEO OUT	BNC
S-Video IN	Mini DIN 4-pin
RGB1/YPbPr IN	BNC x 5
RGB2 IN	D-sub HD 15-pin x 1
Optional board slot	
RS-232C/422 IN	D-sub 9-pin female
RS-232C/422 OUT	D-sub 9-pin male
REMOTE 1 IN	M3 jack
REMOTE 1 OUT	M3 jack
REMOTE 2 IN	D-sub 9-pin female (parallel)
Optical axis shift*	Powered; horizontal ±30%, vertical ±65%
Keystone correction range	±40° (with ET-D75LE2)
Installation	Front/rear, ceiling/floor (menu selection)
Power cord length	2.5 m (8.2')
Power supply	100–120 V AC, 60 Hz
Power consumption	800 W (800 VA) (12 W during standby mode with fan stopped)
Dimensions (W x H x D)	20-7/8" x 7-7/8" x 21-9/32" (530 x 200 x 540 mm) (without lens and lens hood)
Weight	48.5 lbs/22.0 kg (without lens)
Operating temperature	32°–104°F (0°–40°C) 32°–95°F (0°–35°C) (dual lamp, lamp power: high)
Operating humidity	10%–80% (no condensation)

* Shift range is limited during simultaneous horizontal and vertical shifting.

Supplied accessories

- Wireless/wired remote control unit
- Batteries for remote control unit
- Remote control cable
- Power cord

Optional accessories

- Replacement lamp unit (single): ET-LAD7700
- Replacement lamp unit (set of two lamps): ET-LAD7700W
- Replacement long-life lamp unit (single): ET-LAD7700L
- Replacement long-life lamp unit (set of two lamps): ET-LAD7700LW
- Ceiling mount bracket: ET-PKD77H
- Low ceiling mount bracket: ET-PKD75S
- Dual stacking mount bracket: ET-DFD75
- Carrying handle: ET-HAD75
- Zoom lens (1.0–1.2:1): ET-D75LE6
- Zoom lens (1.5–2.0:1): ET-D75LE1
- Zoom lens (2.0–3.0:1): ET-D75LE2
- Zoom lens (3.0–5.0:1): ET-D75LE3
- Zoom lens (5.0–8.0:1): ET-D75LE4
- Zoom lens (8.0–15.0:1): ET-D75LE8
- Fixed focus lens (0.8:1): ET-D75LE5
- Network board: ET-MD77NT
- DVI-D/network board: ET-MD77DV
- SD-SDI/network board: ET-MD77SD1 (480i, 576i)
- HD-SDI/SD-SDI/network board: ET-MD77SD3 (480i, 576i, 720/60p, 720/50p, 1035/60i, 1080/60i, 1080/50i, 1080/25p, 1080/24p, 1080/24sF, 1080/30p)
- Wireless mouse receiver: ET-RTMRC2

Lamp mode/brightness


No. of lamp	Lamp power	Brightness	
		Normal lamp	Long-life lamp
Dual	High	6,000 lm	–
	Low	4,800 lm	3,000 lm
Single	High	3,000 lm	–
	Low	2,400 lm	1,500 lm

Lamp mode/lamp life

Lamp mode	Lamp life	
	Normal lamp	Long-life lamp
High	1,500 hr	–
Low	2,000 hr	4,000 hr

- Using the long-life lamps, lamp life is 8,000 hours maximum when operated in single lamp mode with the lamp relay function on.
- Lamp life varies depending on usage conditions and the surrounding environment.
- When the long-life lamps are used the lamp power mode is automatically set to low.

Dimensions

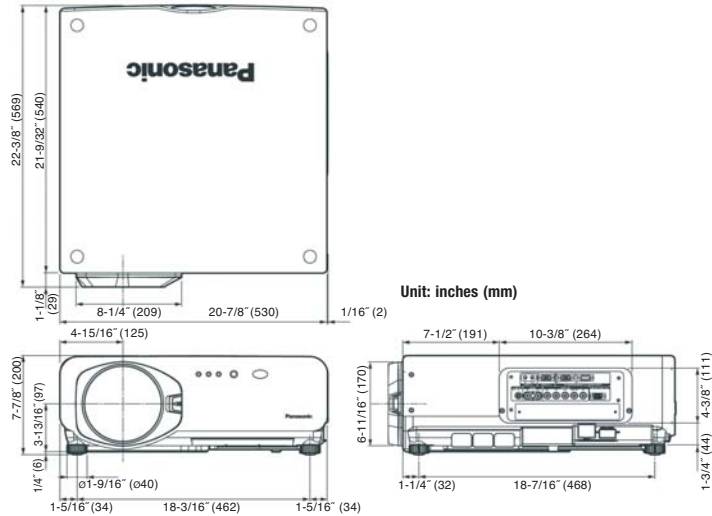

NOTES ON USE

The projector uses of high-wattage lamp that becomes very hot during operation. Please observe the following precautions.

1. Never place objects on top of the projector while it is operation.
2. Make sure there is an unobstructed space of 500 mm or more around the projector's exhaust openings.
3. Do not stack projector units directly on top of one another for the purpose of multiple (stacked) projection. When stacking projector units, be sure to provide the amount of space indicated between them. These space requirements also apply to installation where only one projector unit is operating at one time and the other unit is used as a backup.
4. If the projector is placed in a box or enclosure, the temperature of the air surrounding the projector is between 0°C and 35°C. Also make sure the projector's intake and exhaust openings are not blocked. Take particular care to ensure that hot air from the exhaust openings is not sucked into the intake openings.
5. Because the ET-D75LE5 is a fixed short-throw lens, the lens shift function cannot be used with it.
6. When the ET-D75LE6 is mounted to the PT-D7700 or PT-DW7000, the lens cover that is included with the projector cannot be used as is. Please use the lens cover that is included with the ET-D75LE6.

Operating the Projector Continuously:

1. If the projector is to be operated continuously 24 hours a day, use the dual-lamps optical system's alternating lamp operation(lamp changer) function.
 - The projector cannot be operated continuously 24 hours a day in dual-lamp mode.
 - Allow a minimum of two hours per day of non-operation time per day if the using the dual-lamp mode.
2. The lamp replacement cycle duration becomes shorter if the projector is operated repeatedly for short periods.
 - The projector uses a high-voltage mercury lamp that contains high internal pressure.
 - This lamp may break, emitting a large sound, or fail to illuminate, due to impact or extended use.
 - The length of time that it takes for the lamp to break or fail to illuminate varies greatly depending on individual lamp characteristics and usage conditions.
 - The brightness of the lamp will gradually decrease with use.

Panasonic®

Projectors Global Web Site: <http://panasonic.co.jp/pavc/global/projector>

Please contact Panasonic or your dealer for a demonstration.

Panasonic Projector Systems Company,
Unit of Panasonic Corporation of North America
www.panasonic.com/projectors

Headquarters
3 Panasonic Way, 4B-9
Secaucus, NJ 07094
888-411-1996

Panasonic Canada Inc.
5770 Ambler Drive
Mississauga, Ontario
Canada L4W 2T3
905 624 5010



Weights and dimensions shown are approximate. Specifications are subject to change without notice. Product availability differs depending on region and country. This product may be subject to export control regulations. UHM is a trademark of Matsushita Electric Industrial Co., Ltd. DLP® and the DLP logo are registered trademarks of Texas Instruments. An application has been filed for trademark rights, or trademark rights have been granted, for PJLink in Japan, the United States of America and other countries and areas. VGA and XGA are trademarks of International Business Machines Corporation. All other trademarks are the property of their respective trademark owners. Projection images simulated.
(C) 2006 Panasonic Projector Systems Company is a Unit Company of Panasonic Corporation of North America. All rights reserved.
(C) 2006 Matsushita Electric Industrial Co., Ltd. All rights reserved.