

This board is designed for use with the DLP™ projector PT-DW10000. It enables the input of a HD-SDI (SMPTE 292M) and dual link HD-SDI (SMPTE 372M). Remote control of the projector is also possible from an external computer connected via LAN.


NOTE: Please use the module only on the Panasonic DLP™ projector PT-DW10000.

Specifications

Power supply:	Provided from the DLP™ projector
Power consumption:	Projector power consumption increases approximately 10 W
Terminals:	Serial (Link A/Link B) input: BNC x 2
	HD-SDI signals:
	Single link HD-SDI signal (YCBCR 4:2:2 10 bit)
	SMPTE 292M compliant:
	1080/60i, 1080/50i, 1080/25p, 1080/24p,
	1080/24sF, 1080/30p, 720/60p, 720/50p
	Dual link HD-SDI signal (RGB 4:4:4 12 bit/10 bit)
	SMPTE 372M compliant:
	1920 x 1080/24p, 1920 x 1080/24sF
	Dual link HD-SDI signal (X'Y'Z' 4:4:4 12 bit)
	2048 x 1080/24p, 2048 x 1080/24sF
Dimensions (W x H x D):	204 x 32 x 214 mm (8-1/32" x 1-1/4" x 8-7/16")
Weight:	250 g (8.8 oz)
Operating temperature:	0°C – 45°C (32°F – 113°F)
Operating humidity:	10% – 80% (no condensation)

NOTE: Use connection cables of 5CFB or higher (ex. 5CFB, 7CFB, 5CFTX, etc.).

Dimensions

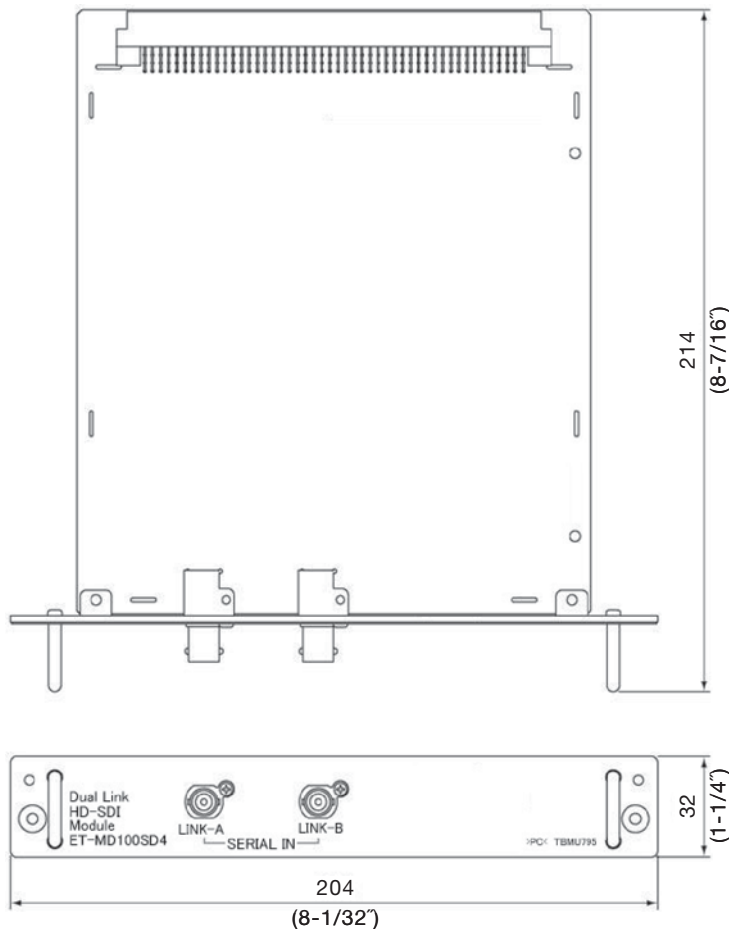

unit : mm (inch)
NOTE: This illustration is not drawn to scale.

Weights and dimensions shown are approximate. Specifications subject to change without notice.
 DLP and the DLP logo are trademarks of Texas Instruments. All other trademarks are the property of their respective trademark owners.