



RIMAGE 2000i

Advancing the art of digital delivery.

THE ALL-NEW RIMAGE 2000i— SIMPLE, POWERFUL, AND AFFORDABLE

As easy as 1-2-3, open the box, plug in the cables, turn on the power. No assembly. No printer to mount or alignments to make. Now you can put the lowest cost, highest quality desktop CD/DVD publishing solution to work in a matter of minutes. The all-new Rimage 2000i offers unrivaled Rimage quality in an easy-to-use, affordable, fully contained system.

It's more than simple, it's simply the best. The sleek, ultra contemporary Rimage 2000i is the most efficient desktop CD/DVD publisher available today. Rimage's optimized 2-to-1 recorder-to-printer ratio eliminates production bottlenecks and maximizes efficiency. Our patented data-streaming technology transmits data to each individual recorder simultaneously so you get more done in less time. The LCD communicates system status information so you're free to focus on your work. From the instant you open the box to the end of every job, you can count on the all-new Rimage 2000i for extraordinary ease-of-use and industry-leading efficiency.

LOW COST OF OPERATION

Speed, reliability, and a large 100 disc input bin—combined with an innovative ink management system—make the Rimage 2000i the leader in price and performance.



RIMAGE 2000i	
	• All-in-one system, fully assembled
	• Reliable unattended networked solution
	• Instant job feedback on LCD display
	• World-class six-ink printing

RIMAGE 2000i


SUPERIOR NEW PRINTING TECHNOLOGY

It's fast, affordable, and easy-to-use. But what really makes the all-new Rimage 2000i printer so powerful is the HP-enabled thermal inkjet technology. The Rimage 2000i offers the smallest ink droplet available (3 pico-liters) for unsurpassed ink control and superb color management. HP's unique PhotoREt IV color-layering and ColorSmart III color optimization technology create realistic photo images, vivid color output, and extremely sharp text for the best quality label printing—directly on your disc.

A SIMPLE, COMPLETE SOLUTION

- **Leading-edge software and advanced robotics**—Powerful, flexible, and scalable software for individuals, workgroups and large enterprise applications. Robotics automate and accelerate the entire disc publishing process.
- **Up-to-the-minute activity status**—Rimage 2000i's sleek, integrated design includes an LCD display for system status notification.

inkjet
technology by

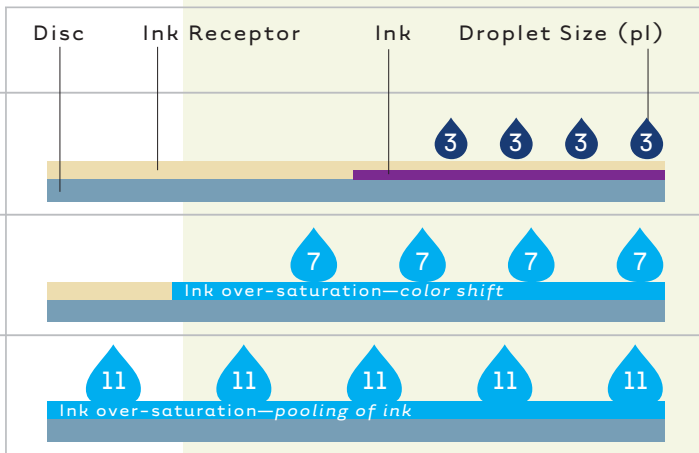

The Rimage 2000i's innovative thermal inkjet technology places smaller drops more accurately, giving you superb image and text quality project after project.

- **World-class printing**—Rimage's 480i desktop printer with unique HP technology offers a greater range of colors, lighter tones, and smoother gradations between tones without scratching or smudging—flawless disc printing every time.
- **No-charge telephone support**—Rimage's superior solutions are backed by superior service. Rimage offers global online and telephone technical support.



SPECIFICATIONS

Print Technology

Thermal Inkjet printing (incorporates the Rimage 480i)

Printing Resolution

Up to 4800 dpi (driver selectable)

Ink Cartridges

Black (Rimage PN# RB1)
CMY (Rimage PN# RCI)
Photo (Rimage PN# RPI)

Disc Capacity

Input — 100
Output — 110

Standard System Requirements

Processor: Intel Celeron 2.0 GHz
RAM/Memory: 512 Mb, DDR-200
Fixed Storage: Two 36 GB, 7,200 RPM, Serial-ATA hard drives
Graphics: 1024 x 768, (32 bit color), 60 Hz
I/O: One USB port, 1 Firewire Port

Enhanced System Requirements

Processor: Intel Pentium 4, 2.4 GHz
RAM/Memory: 512 Mb, DDR-200
Fixed Storage: Three 36 GB, 10,000 RPM, Serial-ATA hard drives
Graphics: 1024 x 768, (32 bit color), 60 Hz
I/O: One USB port, 1 Firewire Port

Standard Configuration

1 unit (2 CD recorders or 2 DVD recorders)

Maximum Configuration

2 units (4 recorders and 2 printers) can be run from a single PC

Supported Operating Systems

Windows 2000 Professional, Windows XP Professional

Supported Clients

Windows 2000, XP, Mac OS 10.2

Client Interface

Rimage QuickDisc

Data Streaming

Yes (with Enhanced System Requirements)

Network Ready

Yes

Power

100-240V, 1.5A, 50/60 Hz Auto-configuring

Certifications

Emissions: FCC Class B

Safety: UL, cUL, CE

Physical

Height: 21.0" x Width: 15.75" x Depth: 20.0"

(53.3 cm x 40 cm x 50.8 cm)

Weight: 58 lbs. (26.3 kg)

Interface

USB 1.1, Firewire IEEE 1394

Warranty

One year limited

Rimage Corporation
7725 Washington Avenue South
Minneapolis, MN 55439
USA

phone: 952.944.8144

fax: 952.944.7808

web: www.rimage.com

Rimage Europe GmbH
Hans-Böckler-Str. 7
63128 Dietzenbach
Germany

phone: 49.0.6074.8521.0

fax: 49.0.6074.8521.21

web: www.rimage.de

Contact your local Rimage Services Representative for warranty and service option details.